


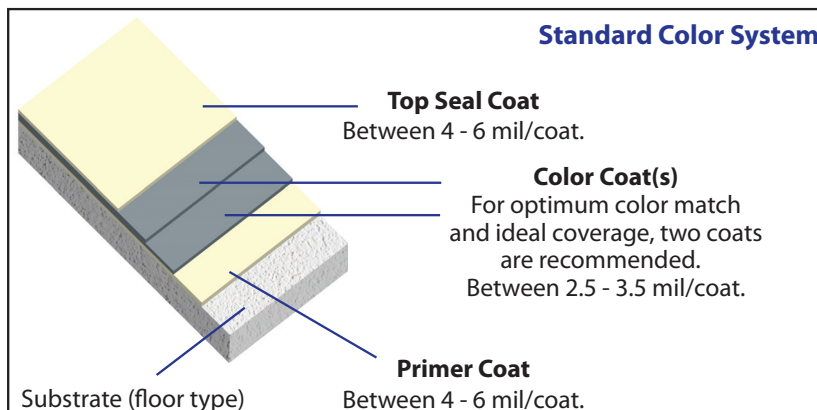


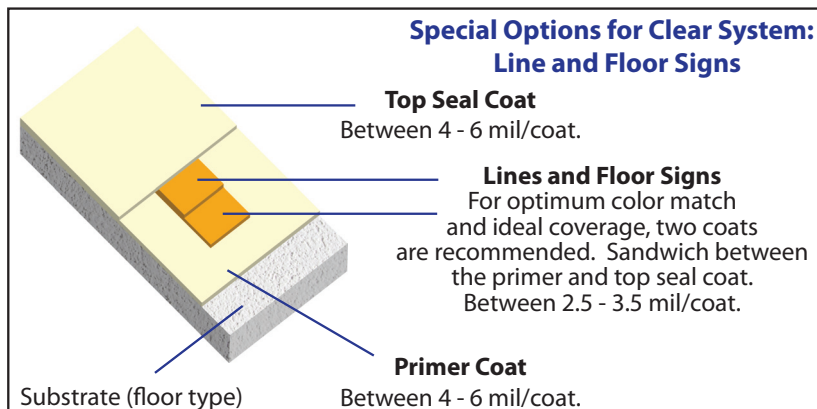

## RapidShield™ Floor Coating Systems

Various floor coatings are available in numerous colors and thicknesses as well as other appearances. Substrate normally means clean and dry concrete, but RapidShield™ can be applied to other existing floor types.

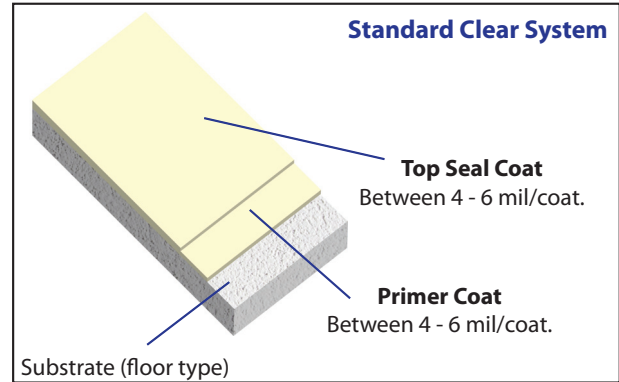

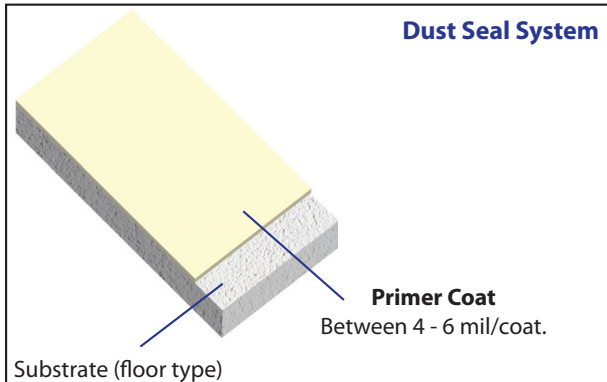

**Anti-skid**  
Applied within the top seal coat.

**Special Options for Color System:  
Lines, Floor Signs and Anti-skid**

**Top Seal Coat**  
Between 4 - 6 mil/coat.

**Lines & Floor Signs**  
For optimum color match and ideal coverage, two coats are recommended.  
Between 2.5 - 3.5 mil/coat.

**Color Coat(s)**  
For optimum color match and ideal coverage, two coats are recommended.  
Between 2.5 - 3.5 mil/coat.

**Primer Coat**  
Between 4 - 6 mil/coat.

**Substrate (floor type)**

**High Build Clear System**

**Top Seal Coat**  
Between 4 - 6 mil/coat.

**Primer Coat**  
Between 10 - 20 mil/coat.

**Substrate (floor type)**

**Special Options for High Build Clear System:  
For Uneven Floors**

**Top Seal Coat**  
Between 4 - 6 mil/coat.

**Primer Coat**  
Between 10 - 20 mil/coat.

**Substrate (floor type)**

**High Build Color System**

**Top Seal Coat**  
Between 4 - 6 mil/coat.

**Color Coat(s)**  
For optimum color match and ideal coverage, two coats are recommended. Sandwich between the primer and top seal coat.  
Between 2.5 - 3.5 mil/coat.

**Primer Coat**  
Between 10 - 20 mil/coat.

**Substrate (floor type)**